

REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH:1000 VAC RMS 60Hz, 1MIN.


MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
 2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
 3. PLATING : GOLD PLATING OVER NICKEL.
 4. OPERATING LIFE : 750 CYCLES MIN.
 5. PCB RETENTION PRE-SOLDER 1 LB MIN.
 6. PCB RETENTION POST-SOLDER: 10 LBS MIN.
- ENVIRONMENTAL:
1. STORAGE: -40°C TO +85°C.
 2. OPERATION: 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.


PART NUMBER: 59A-S2266-E1X

GOLD PLATING "U"
1-FU" 2-2U" 3-3U" 4-6U"
5-10U" 6-30U"

DIM	PORT	2x2	2x4	2x5	2x6	2x8
"A"	±0.25	25.74	49.61	61.55	73.49	97.37
"B"		11.938	35.814	47.752	59.690	83.566
"C"	±0.25	22.10	45.97	57.91	69.85	93.73

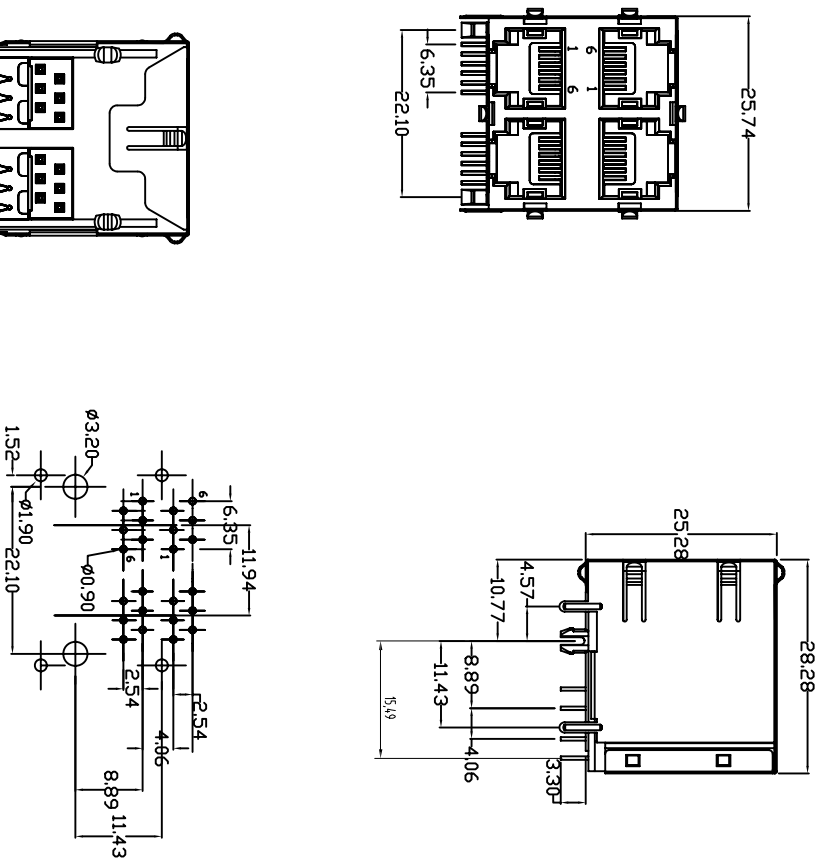

PC Board Layout



HTTP://WWW.RJ45JACK.COM

YOU LONG ELECTRONICS LIMITED

59A 2X2 6P6C PCB JACK&SHIELDLED WITH EMI FINGER SIDE ENTRY ROUND PIN

DIMENSION IN mm [Inch]		TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X ± 0.20	X * ± 1"	.XXX ± 0.15	.X * ± 0.5"
.XXXX ± 0.075			

检验项目: 外观, 尺寸, 电性能

检验方法: 目视, 卡尺, 测试仪

检验标准: 企业标准

检验日期: 2012.10.29

检验人员: Oscar

检验地点: 生产部

检验结果: 合格

检验结论: 合格