

REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

NOTES:

ELECTRICAL:




- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH:1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
 - CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm, GOLD PLATING OVER NICKEL.
 - PLATING : GOLD PLATING OVER NICKEL.
 - OPERATING LIFE : 750 CYCLES MIN.
 - PCB RETENTION PRE-SOLDER 1 LB MIN.
 - PCB RETENTION POST-SOLDER: 10 LBS MIN.
- ENVIRONMENTAL:
- STORAGE: -40°C TO +85°C.
 - OPERATION: 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 59A-S2164-E0X

GOLD PLATING U"
1-FU" 2-2U" 3-3U" 4-6U"
5-19U" 6-30U"

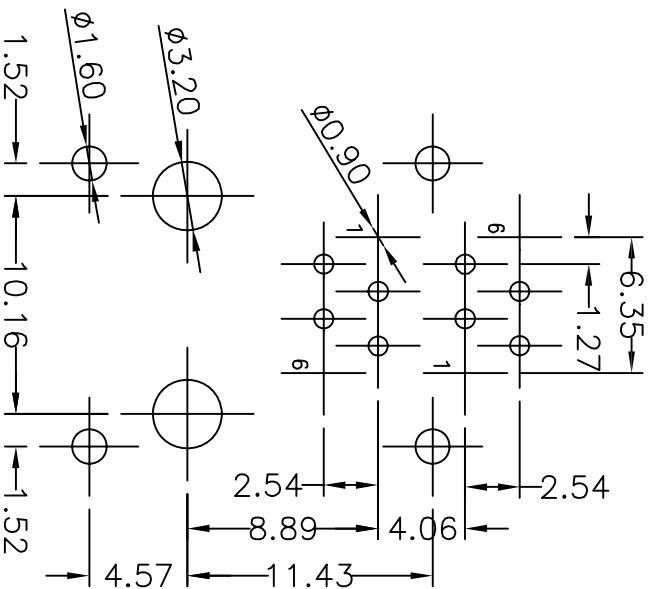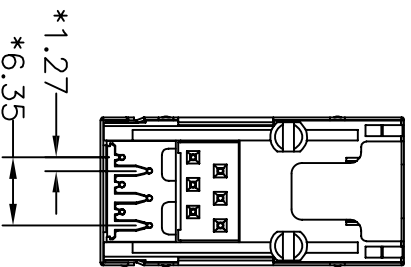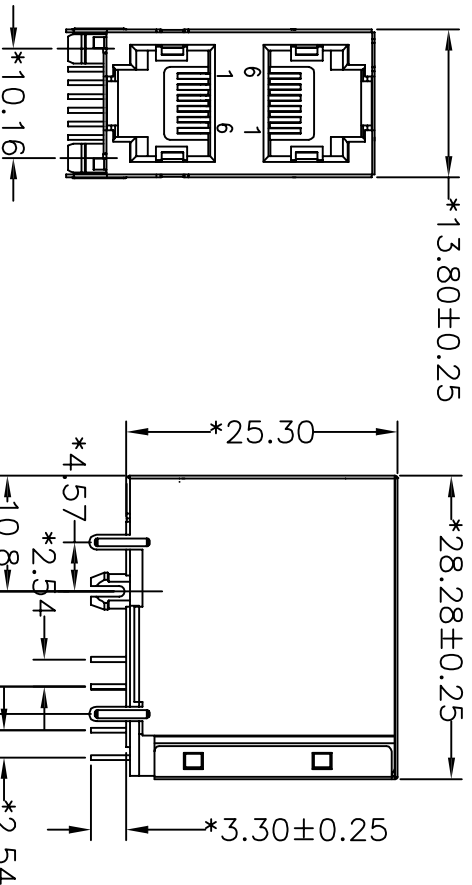

PC Board Layout

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
: Cp/Cpk and SPC Control Item		YOU LONG ELECTRONICS LIMITED	
: Inspection Item		59A 2X1 6P4C PCB JACK WITH SHIELDED SIDE ENTRY ROUND PIN	
TOLERANCE UNLESS OTHERWISE SPECIFIED		DWG NO. YL59A-S2164-E0	
.X±0.20 X*±1"		图号	
.XXX±0.15 .X*±0.5"		文件号	
.XXXX±0.075		标题	
批准		审核	
APPROVE		DRAW	
检查		Oscar	
SCALE		1:1	
图例		A3	
REV		1	
A		A	

If you have any questions, Don't hesitate to email sales@rj45jack.com, please!