

REV	更改内容 MODIFICATION	日期 DATE	制图 DRAW	批准 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

NOTES:


ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 500 VAC RMS 50HZ, 1MIN.


MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLYESTER(PA46 G30 UL94V-0) (BRACK COLOR)
 - CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm (C5210)
 - PLATING : GOLD-PLATED IN THE CONTACT AREA
 - SHIELD: COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI. 20μ" Min.
 - OPERATING LIFE : 750 CYCLES MIN.
 - POB RETENTION PRE-SOLDER : 1 LB MIN.
 - PCB RETENTION POST-SOLDER: 10 LBS MIN.
- ENVIRONMENTAL:**
- STORAGE : -40°C TO +85°C.
 - OPERATION: 0°C TO +70°C.
 - WAVE SOLDERING TEMPERATURE: 250°C TO 260°C(5-10 SECONDS).
 - ROHS COMPLIANT
 - FCC PART 68, SUBPART F
- MATES WITH MODULAR PLUG CONFORMING TO

PART NUMBER: 56B-S1188L0-XX

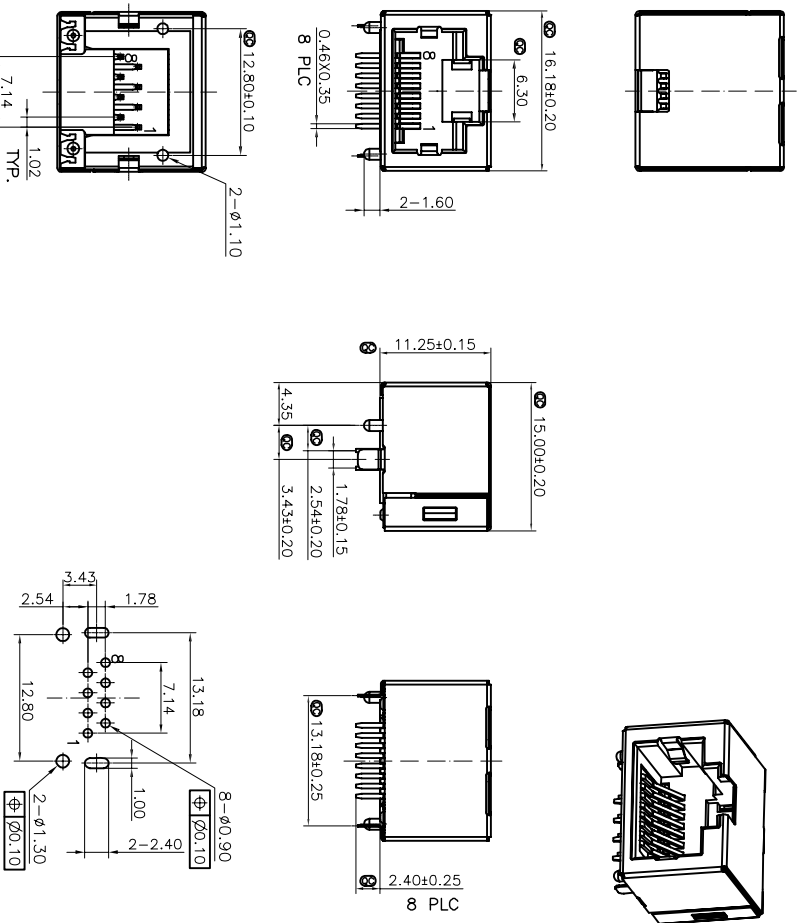

PC BOARD LAYOUT COMPONENT (THICKNESS:1.6mm)
SIDE SHOWN

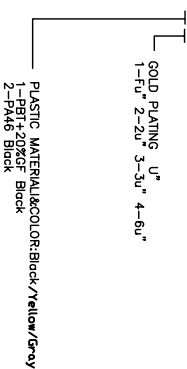

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
: Inspection Item		YOU LONG ELECTRONICS LIMITED	
: Cp/Cpk and SPC Control Item		DWG NO. YL56B-S1188L0	
DIMENSION IN mm [Inch]		TITLE	
TOLERANCE UNLESS OTHERWISE SPECIFIED		56B 1X1 8P8C PCB JACK WITH SHIELDED SIDE ENTRY/TAB-UP FLAT PIN	
.X±0.20	X.±1"	比例	1:1
.XX±0.15	.X.±0.5"	图框	A3
.XXX±0.075		图例	1
批准	检查	审核	1
批准	检查	审核	1

