

If you have any questions, Don't hesitate to email sales@j45jack.com, please!

REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

NOTES:

MATERIAL:

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER(U194V-0).
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE T=0.35mm (C5191).
- 3.PLATING :GOLD PLATING OVER NICKEL.

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :1.5 AMP.
- 3.CONTACT RESISTANCE :50 MILLIOHMS MAX.

- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.

MECHANICAL:




- 1.DURRABILITY :750 CYCLES MIN.
- 2.PCB RETENTION PRE-SOLDER

ENVIRONMENTAL:



- 1.STORAGE : -40°C TO +85°C.
  2. OPERATION : 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

PART NUMBER: SMT-N1166-H33X

- GOLD PLATING "U"  
1-FU 2-2U 3-3U 4-6U  
5-15U 6-30U
- PLASTIC MATERIAL:COLOR:Black/Yellow/Gray  
1-PBT+20%GF Black  
2-PA46 Black  
3-1CP Black

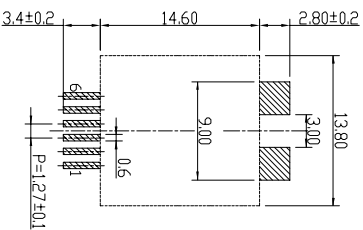

PC BOARD LAYOUT  
THICKNESS=1.6MM

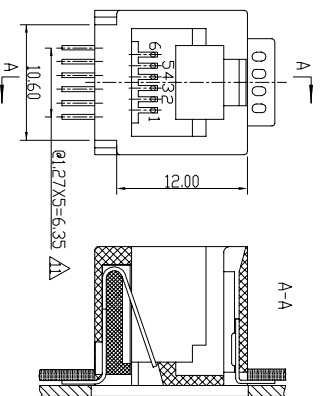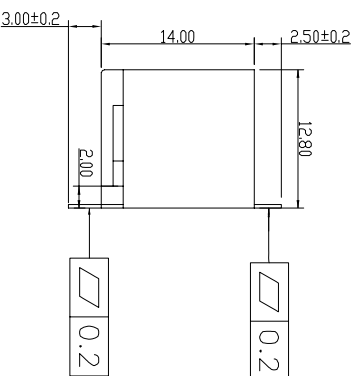

YOU LONG CONNECT THE WORLD  
YOU LONG ELECTRONICS LIMITED

文件号: YLSMT-N1166-H3  
图号: YLSMT-N1166-H3

标题: SMT 1X1 6P6 PCB JACK WITH SHIELDED  
H=12.8MM ,TOP ENTRY,FLAT PIN

审核 APPROVE	检查 CHECK	制图 DRAW	比例 SCALE	图幅 SIZE	数量 REV
		Oscar	1:1	A3	1/A



If you have any questions, Don't hesitate to email sales@j45jack.com, please!