
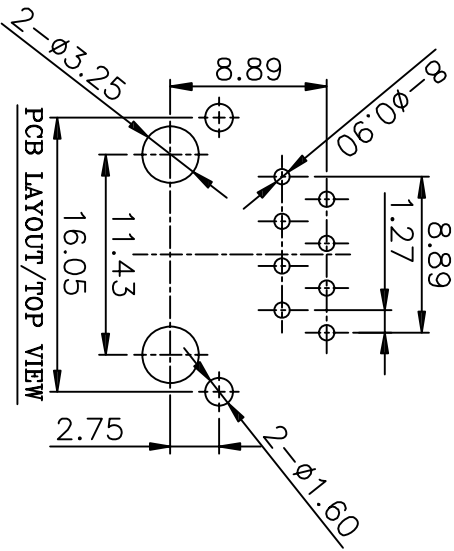
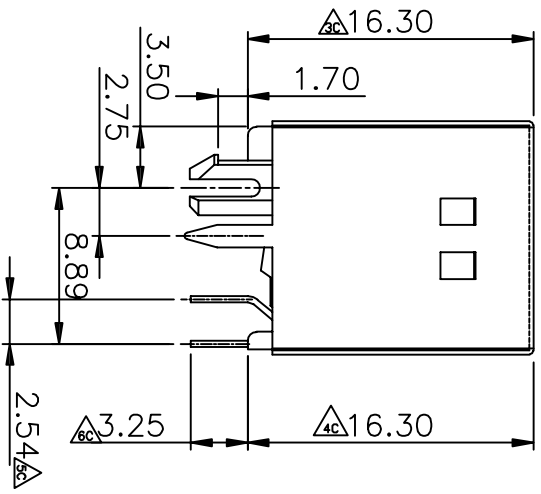


NOTES:

MATERIALS:
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0.
 CONTACTS: PHOSPHOR BRONZE
 PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
 TIN PLATING OVER NICKEL IN SOLDER AREA.
 SHIELDED: BRASS WITH NICKEL PLATED

Electrical:
 1.Voltage Rating:125 Vac Rms.
 2.Current Rating:1.5 Amp.
 3.Contact Resistance:40 Milliohms Max.
 4. Insulation Resistance:1000 Megohms Min @500 Vdc.
 5.Dielectric Strength:1000 Vac Rms 60HZ. 1Min.
 Mechanical:
 1.Operating:750 Cycles Min.
 Environmental:
 1.Storage:-40°C To +85°C.
 2.Operation:-20°C To +75°C.
 Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

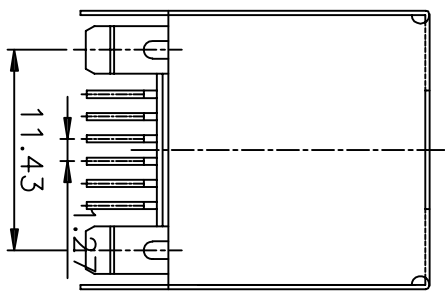

PART NUMBER: 52B-S1188-H1X

GOLD PLATING "U"
 1-30" 2-60" 3-150" 4-300"

REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscdr

HTTP://WWW.RJ45JACK.COM YOU LONG CONNECT THE WORLD		YOU LONG ELECTRONICS LIMITED	
DIMENSION IN mm [Inch]		图号 FILE NO.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		图号 DWG NO.	
.X± 0.20	X.*± 1"	YL52B-S1188-H1	
.XXX± 0.15	.X.*± 0.5"	标题 TITLE	
.XXX± 0.075		S2B 1X1 8P8C PCB JACK WITH SHIELDED H=16.30MM,TOP ENTRY,FLAT PIN	
批准 APPROVE	检查 CHECK	制图 DRAW	审核 APPROVE
OSCDR		比例 SCALE	图幅 SIZE
1:1		A3	1



If you have any questions,Don't hesitate to email sales@rj45jack.com,please!