


If you have any questions, Don't hesitate to email sales@rj45jack.com, please!

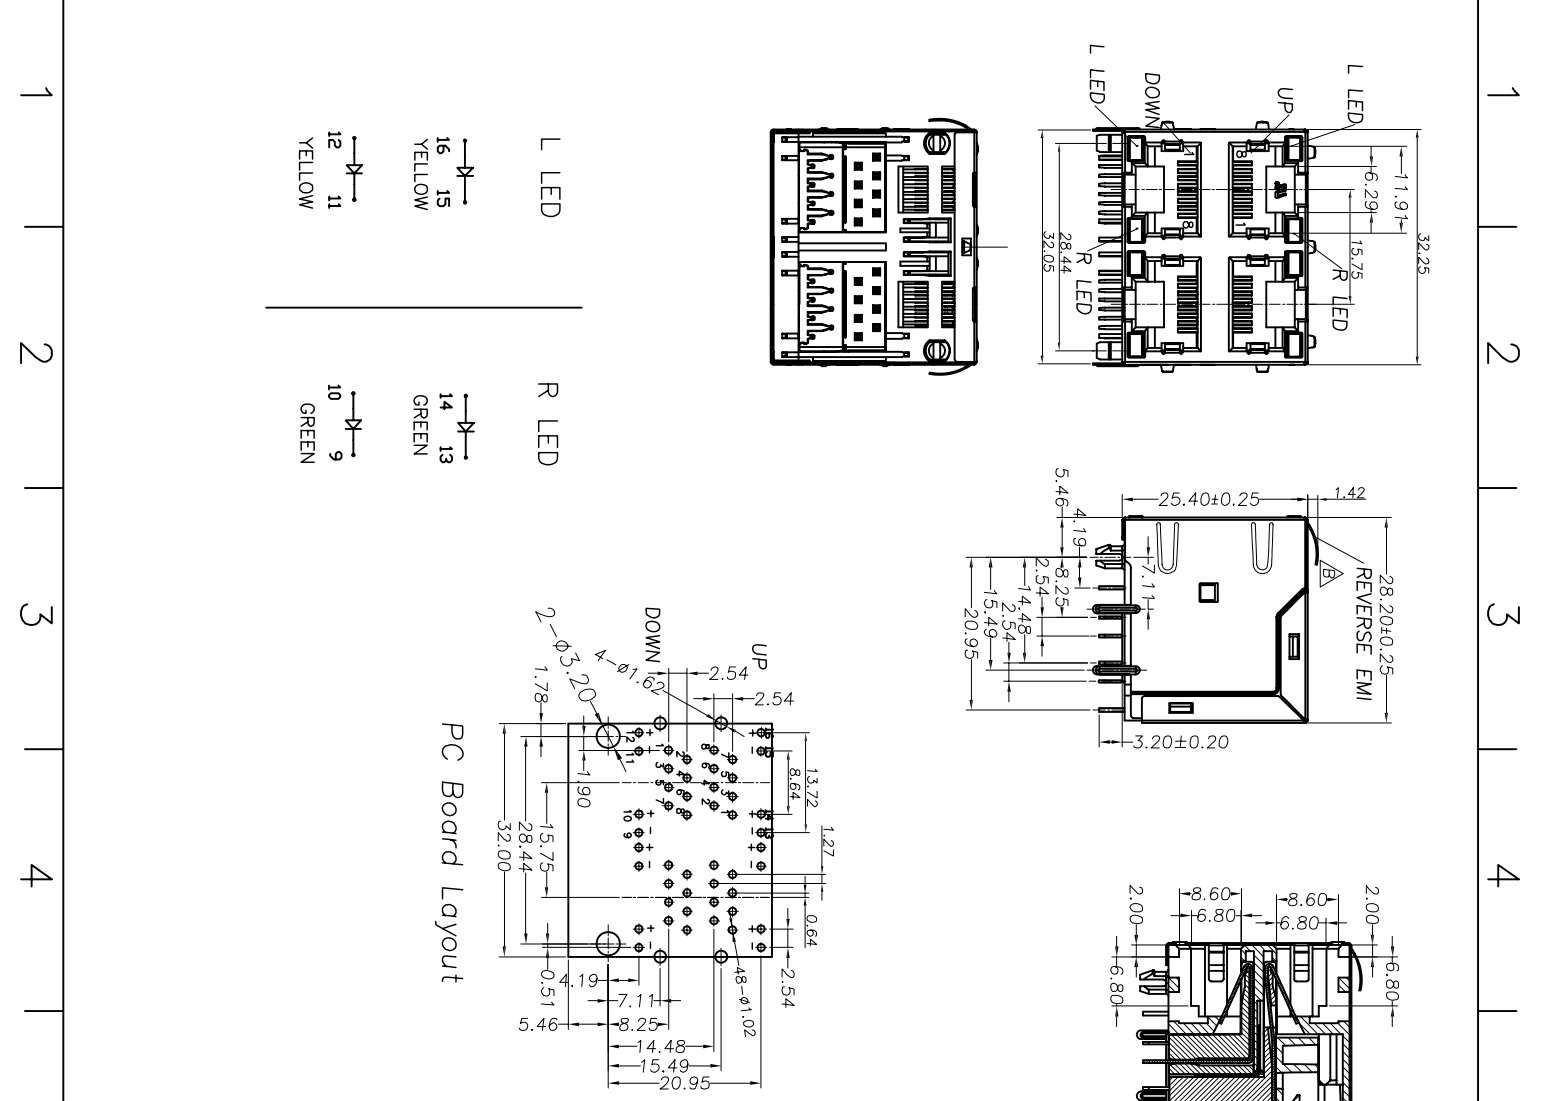


PC Board Layout

修改内容	日期	绘图	审核
REV	DATE	DRAW	APPROVE
A	2012/10/29	JDL	Oscor
修改内容			

NOTES:

- MATERIAL:**
- 1. HOUSING MATERIAL :GLASS FILLED POLYESTER(U94V-0) (G5100).
 - 2. CONTACT MATERIAL :PHOSPHOR BRONZE Ø0.46mm (C5100).
 - 3. PLATING :GOLD PLATING OVER NICKEL.
 - 4. SHIELD: COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING IN.
 - 5. LED: OPTION.
- ELECTRICAL:**
- 1. VOLTAGE RATING :125 VAC RMS.
 - 2. CURRENT RATING :1.5 AMP.
 - 3. CONTACT RESISTANCE :50 MEGOHMS MAX.
 - 4. INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
 - 5. DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.
 - 6. LED RATINGS: FORWARD VOLTAGE: 2.2 VOLTS TYPICAL. REVERSE VOLTAGE: 5 VOLTS MAXIMUM.
- MECHANICAL:**
- 1. DURABILITY: 750 CYCLES MIN.
 - 2. PCB RETENTION PRE-SOLDER ENVIRONMENTAL:
 - 1. STORAGE : -40°C TO +85°C.
 - 2. OPERATION: -20°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 59D-S2288L1-E2XX

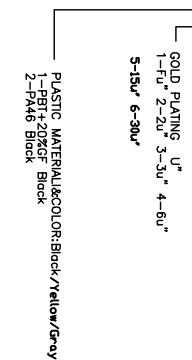

HTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
: Cp/Cpk and SPC Control Item		YOU LONG ELECTRONICS LIMITED	
: Inspection Item		TITLE	
DIMENSION IN mm [Inch]		59D 2X2 BRPC PCB JACK&SHIELDED WITH EMI FINGER SIDE ENTRY FLAT PIN	
TOLERANCE UNLESS OTHERWISE SPECIFIED		图号	
.X±0.20	X.*± 1"	DWG NO. YL59D-S2288L1-E2	
.XX±0.15	.X.*± 0.5"		
.XXX±0.075			
批准	检查	审核	
批准	检查	DRAWN	
Oscor		1:1	
		比例	
		图框	
		大小	
		A3	
		审核	
		1	
		REV	
		A	