
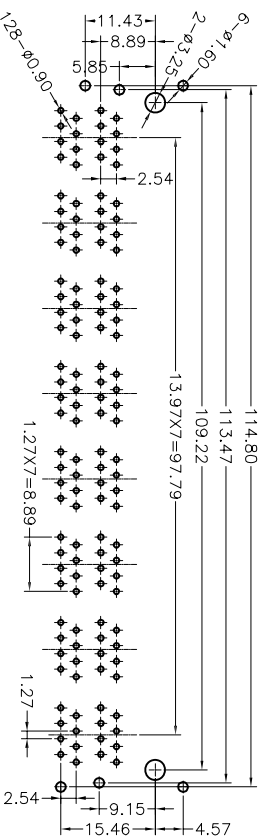
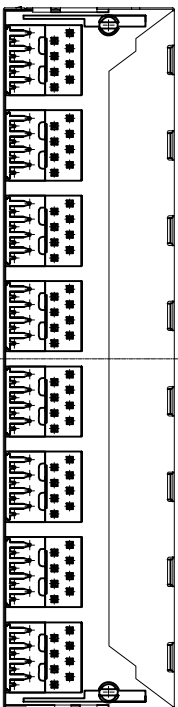


REV	变更内容	日期	制图	审核
A	版面发行	2012/10/29	JDL	Oscar

NOTES:

- MATERIAL:
- HOUSING MATERIAL :GLASS FILLED POLYESTER(U94V-0).
 - CONTACT MATERIAL :PHOSPHOR BRONZE $\phi 0.46\text{mm}$ (C5100).
 - PLATING :GOLD PLATING OVER NICKEL.
 - SHIELD,COPPER ALLOY 0.20mm THICKNESS PLATING NI.
- ELECTRICAL:
- VOLTAGE RATING :125 VAC RMS.
 - CURRENT RATING :1.5 AMP.
 - CONTACT RESISTANCE :50 MILLIOHMS MAX.
 - INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
 - DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.
- MECHANICAL:
- DURABILITY :750 CYCLES MIN.
 - P2B RETENTION PRE-SOLDER :1 LB MIN.
- ENVIRONMENTAL:
- STORAGE : -40°C TO +85°C.
 - OPERATION : 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

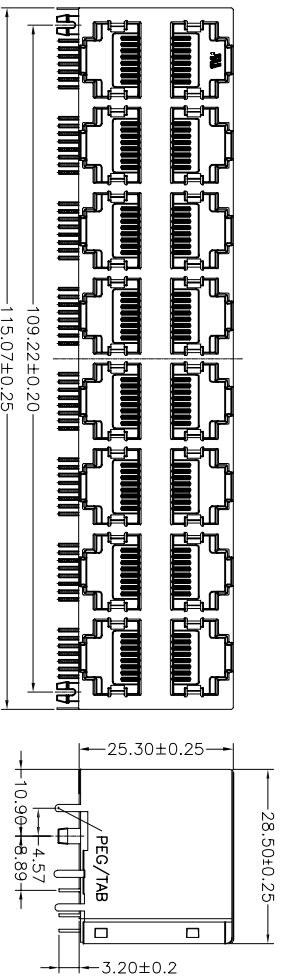

PC Board Layout

PART NUMBER: 59A-S2888A-E0XX

GOLD PLATING "U"
1-FU" 2-20" 3-30" 4-6U"
PLASTIC MATERIAL:COLOR:Black/Yellow/Gray
1-FR+2-DIGR Block
2-FR+6 Bidder

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
:Cp/Cpk and SPC Control Item		YOU LONG ELECTRONICS LIMITED	
DIMENSION IN mm [Inch]		图号	图号
TOLERANCE UNLESS OTHERWISE SPECIFIED		FILE NO.	DWG NO.
.X±0.20	X*±1"	59A 2X8 8P9C PCB JACK&SHIELDED V/D EMI FINGER	YL59A-S2888A-E0
.XX±0.15	.X*±0.5"	TITLE	59A 2X8 8P9C PCB JACK&SHIELDED V/D EMI FINGER
.XXX±0.075		规格	SIDE ENTRY,ROUND PIN
批准	检查	制图	审核
APPROVE	CHECK	OSCAR	1
		比例	1:1
		图框	A3
		审核	1
		REV	A

If you have any questions,Don't hesitate to email sales@rj45jack.com,please!