
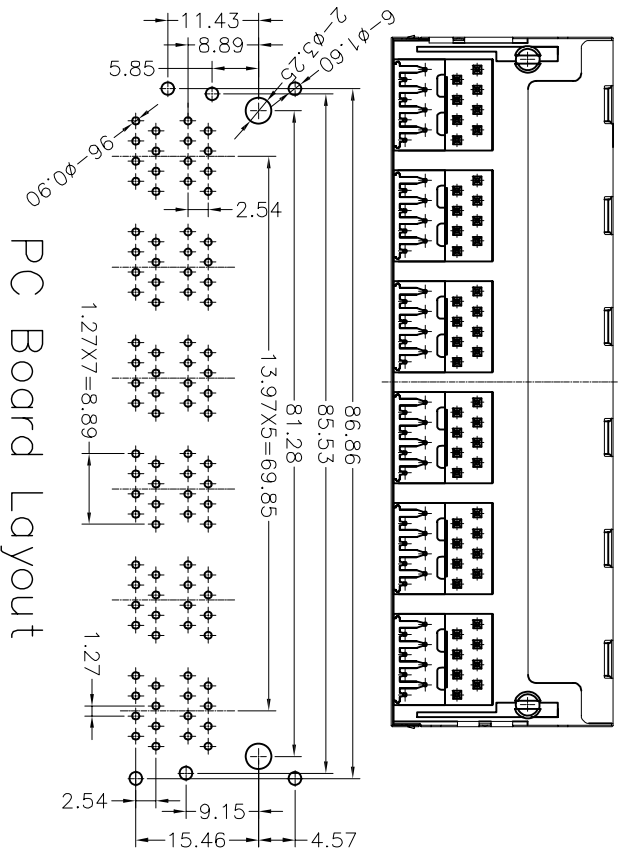


REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	批准 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

NOTES:

- MATERIAL:
- HOUSING MATERIAL :GLASS FILLED POLYESTER(U94V-0).
 - CONTACT MATERIAL :PHOSPHOR BRONZE $\phi 0.46\text{mm}$ (C5100).
 - PLATING :GOLD PLATING OVER NICKEL.
 - SHIELD,COPPER ALLOY 0.20mm THICKNESS PLATING NI.
- ELECTRICAL:
- VOLTAGE RATING :125 VAC RMS.
 - CURRENT RATING :1.5 AMP.
 - CONTACT RESISTANCE :50 MILLIOHMS MAX.
 - INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
 - DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.
- MECHANICAL:
- DURABILITY :750 CYCLES MIN.
 - OPERATION : 0°C TO 70°C.
 - PCB RETENTION PRE-SOLDER :1 LB MIN.
- ENVIRONMENTAL:
- STORAGE : -40°C TO +85°C.
 - OPERATION : 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

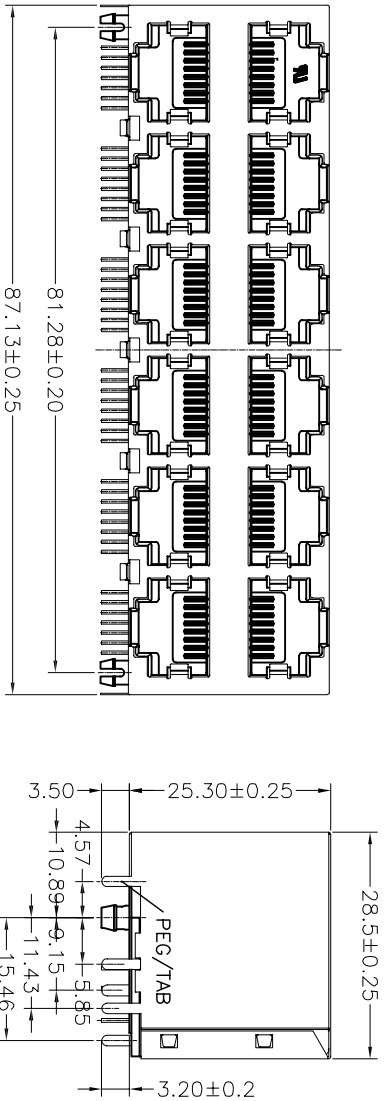

PC Board Layout

PART NUMBER: 59A-S2688A-E0XX

GOLD PLATING "U"
1-FU" 2-2U" 3-3U" 4-6U"
PLASTIC MATERIAL:COLOR:Black/Yellow/Grey
1-FB14-203CR Block
2-FX16 Block

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
: Cp/Cpk and SPC Control Item		YOU LONG ELECTRONICS LIMITED	
DIMENSION IN mm [Inch]		图号 FILE NO.	DWG NO. YL59A-S2688A-E0
TOLERANCE UNLESS OTHERWISE SPECIFIED		标题 TITLE	
.X±0.20	X*±1"	59A 2X6 8P9C PCB JACK&SHIELDED W/D EMI FINGER	
.XX±0.15	.X*±0.5"	59A 2X6 8P9C PCB JACK&SHIELDED W/D EMI FINGER	
.XXX±0.075		SIDE ENTRY,ROUND PIN	
批准 APPROVE	检查 CHECK	制图 DRAW	审核 SCALE
		Oscar	1:1
		A3	1
		REV	1
			A

If you have any questions,Don't hesitate to email sales@rj45jack.com,please!