

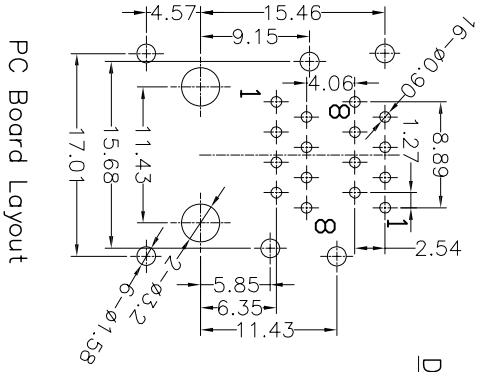
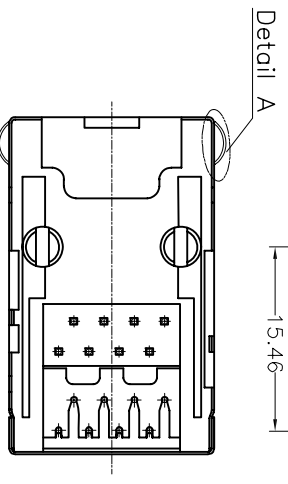


REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

NOTES:

- MATERIAL:
1. HOUSING MATERIAL : GLASS FILLED POLYESTER(U194V-0).
 2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$ (C5100).
 3. PLATING : GOLD PLATING OVER NICKEL.
 4. SHIELD: COPPER ALLOY 0.20mm THICKNESS PLATING. NI.
- ELECTRICAL:
1. VOLTAGE RATING : 125 VAC RMS.
 2. CURRENT RATING : 1.5 AMP.
 3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC.
 5. DIELECTRIC WITHSTANDING RESISTANCE : 1000V AC RMS 50Hz. 1MIN.
- MECHANICAL:
1. DURABILITY : 750 CYCLES MIN.
 2. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- ENVIRONMENTAL:
1. STORAGE : -40°C TO +85°C.
 2. OPERATION : 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 59A-S2188A-E1XX

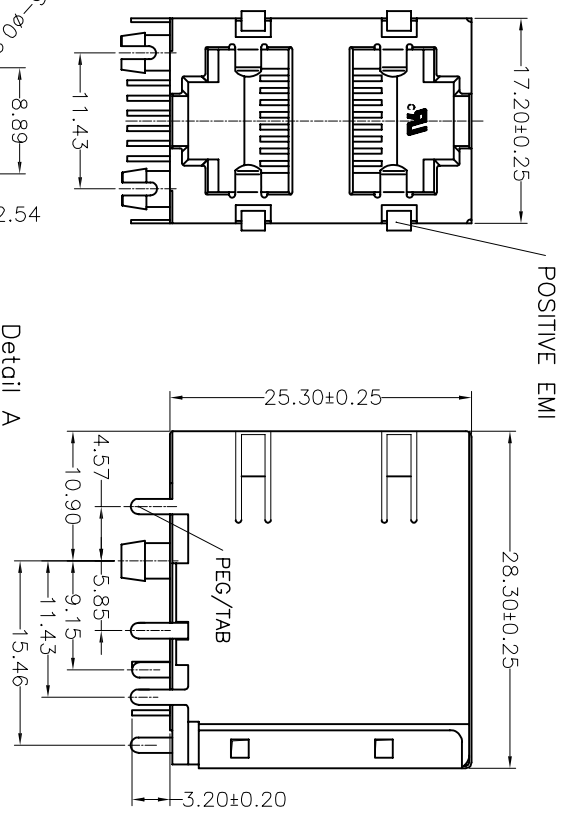

GOLD PLATING "U"
1-10" 2-20" 3-30" 4-60"
PLASTIC MATERIAL & COLOR: Black/Yellow/Grey
1-PBT+20XCF Black
2-PA46 Black

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
: Inspection Item : Cp/Cpk and SPC Control Item		YOU LONG ELECTRONICS LIMITED	
DIMENSION IN mm [Inch]		图号 FILE NO.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		图号 DWG NO. YL59A-S2188A-E1	
.X ± 0.20 X ± 1°		标题 TITLE 59A 2X1 8P8C PCB JACK&SHIELDED WITH EMI FINGER	
.XX ± 0.15 X ± 0.5°		规格 SPEC. SIDE ENTRY, ROUND PIN	
.XXX ± 0.075		制图 DRAW Oscar	
批准 APPROVE		审核 CHECK	
比例 SCALE 1:1		图幅 SIZE A3	
版本 REV 1		审核 REV A	