

REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

NOTES:

ELECTRICAL:



- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz, 1MIN.

MECHANICAL:


- HOUSING MATERIAL : NYLON+30%G.F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm
- PLATING : GOLD PLATING OVER NICKEL.
- SHIELD: COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- LED:OPTION
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
 - OPERATION: 0°C TO +70°C.
 - WAVE SOLDERING TEMPERATURE: 255~265° (5~10SECONDS).
 - ROHS COMPLIANT
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

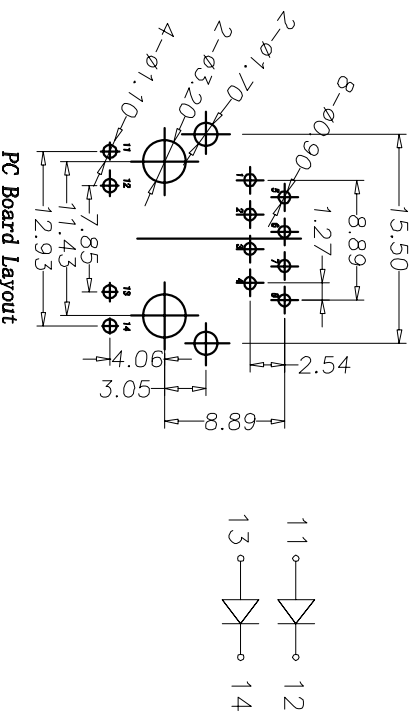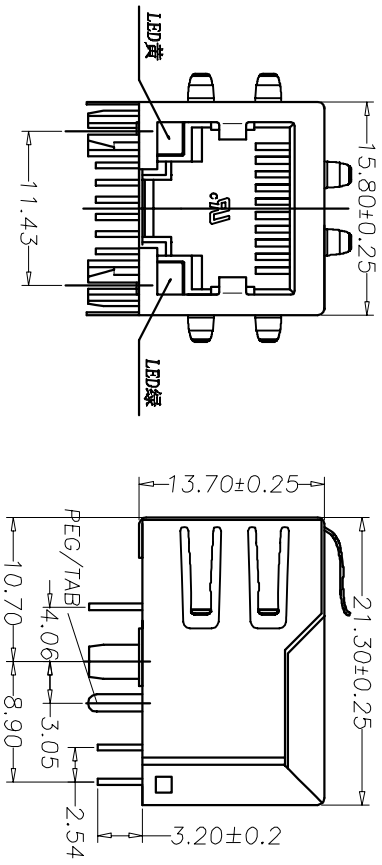

PART NUMBER: 59A-S1108B-L1E2XX

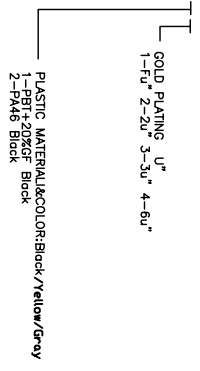

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
YOU LONG ELECTRONICS LIMITED		YOU LONG ELECTRONICS LIMITED	
DIMENSION IN mm [Inch]		公差 TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X±0.20		X*± 1"	
.XXX± 0.15		.X*± 0.5"	
.XXXX± 0.075		公差 CHECK	
:Inspection Item		:Cp/Cpk and SPC Control Item	
FILE NO.		图号 DWG NO.	
59A 1X1 8P8C LED PCB JACK SHIELDED WITH BACKWARD EMI FINGER, SIDE ENTRY,ROUND PIN		YLS9A-S1108B-L1E2	
Oscar		审核 SCALE	
1:1		审核 SIZE	
A3		审核 REV	
A		审核 REV	

If you have any questions,Don't hesitate to email sales@rj45jack.com,please