

REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ, 1MIN.






MECHANICAL:

- HOUSING MATERIAL : NYLON+30%G-F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- SHIELD COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- LED-OPTION
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO +70°C.
- WAVE SOLDERING TEMPERATURE: 255~265° (5~10SECONDS).
- ROHS COMPLIANT
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 59A-S1208A-XX

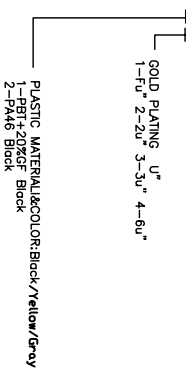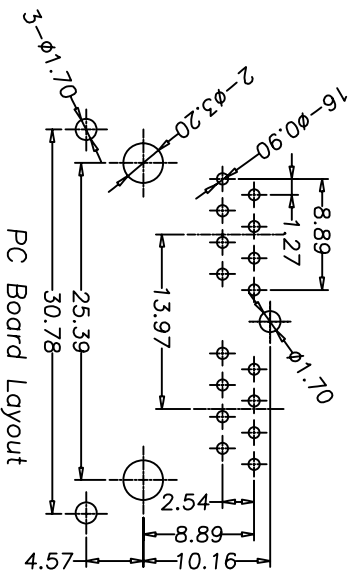

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD		YOU LONG ELECTRONICS LIMITED	
:Inspection Item		DIMENSION IN mm [Inch]		TOLERANCE UNLESS OTHERWISE SPECIFIED	
:Cp/Cpk and SPC Control Item		.X±0.20 X*±1"		.XXX±0.15 X*±0.5"	
		.XXX±0.075		CHECK	
		FILE NO.		图号	
		YL59A-S1208A		59A 1X2 8P8C PCB JACK WITH SHIELDED SIDE ENTRY,ROUND PIN	
		Oscar		SCALE 1:1	
		A3		REV 1	
		A		1	

If you have any questions,Don't hesitate to email sales@rj45jack.com,please!