

更改内容 REV A	变更内容 MODIFICATION	日期 DATE	制图 DRAW	批准 APPROVE
	变更内容 MODIFICATION	2012/10/29	JDL	Oscar

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ, 1MIN.



MECHANICAL:

- HOUSING MATERIAL : NYLON+30%G-F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- SHIELD COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- LED-OPTION
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO +70°C.
- WAVE SOLDERING TEMPERATURE: 255~265° (5~10SECONDS).
- ROHS COMPLIANT
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 59A-N1308A-XX

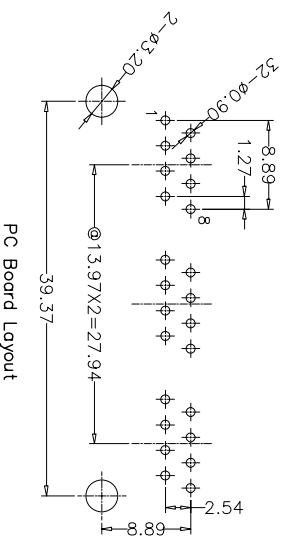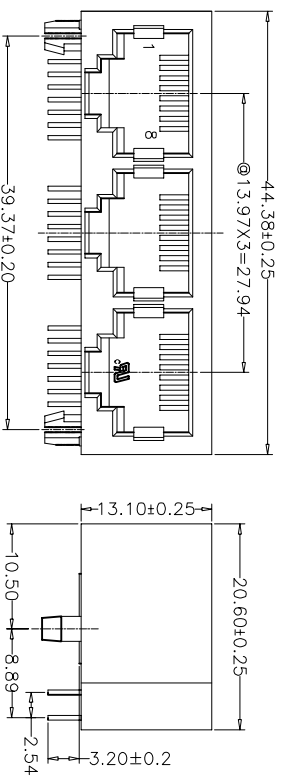

GOLD PLATING U⁺
1-FU⁺ 2-2U⁺ 3-3U⁺ 4-6U⁺
PLASTIC MATERIAL&COLOR:Black/Yellow/Grey
2-PA46 Black

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
YOU LONG ELECTRONICS LIMITED		YOU LONG ELECTRONICS LIMITED	
DIMENSION IN mm [Inch]		TITLE	
TOLERANCE UNLESS OTHERWISE SPECIFIED		59A 1X3 8P8C PCB JACK W/D SHIELD	
.X±0.20	X*±1"	图号	图号
.XX±0.15	.X*±0.5"	FILE NO.	YLS9A-N1308A
.XXX±0.075		DWG NO.	YLS9A-N1308A
批准	检查	制图	审核
APPROVE	CHECK	DRAW	DRW
: Inspection Item		Oscar	
: Cp/Cpk and SPC Control Item		SCALE	
		1:1	
		图幅	
		A3	
		REV	
		1	
		A	

If you have any questions, Don't hesitate to email sales@rj45jack.com, please!