
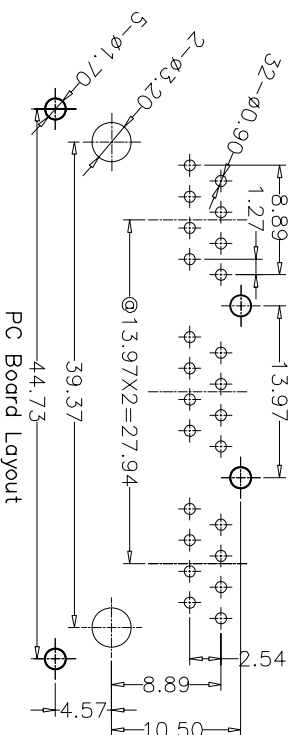
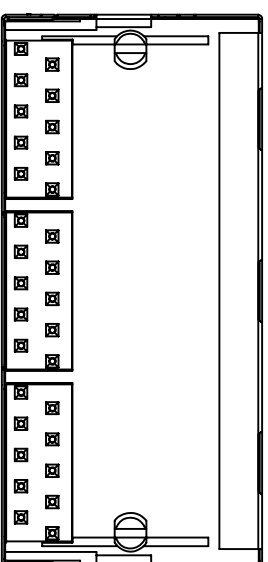


更改内容	日期	制图	审核
REV A	2012/10/29	JDL	Oscar
修改内容			
日期			
制图			
审核			

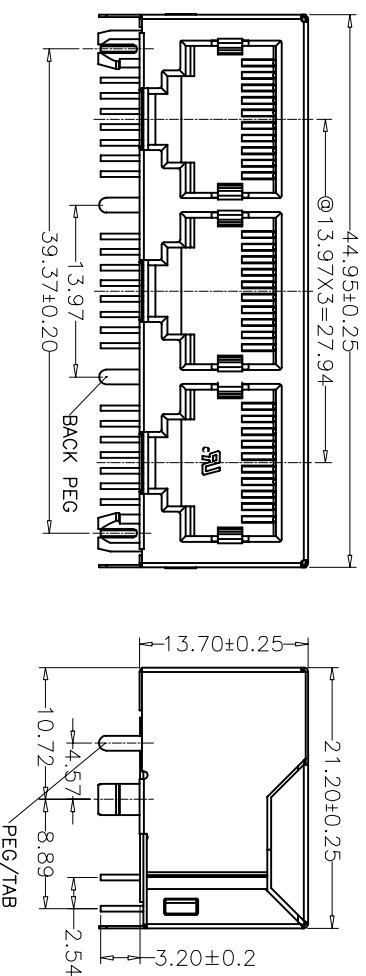

PC Board Layout

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON+30%G-F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- SHIELD COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- LED-OPTION
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO +70°C.
- WAVE SOLDERING TEMPERATURE: 255~265° (5~10SECONDS).
- ROHS COMPLIANT
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 59A-S1308A-XX

- GOLD PLATING U"
  - 1-Fu" 2-2u" 3-3u" 4-6u"
- PLASTIC MATERIAL:COLOR:Black/Yellow/Gray
  - 1-BEIT-20XK5 Black
  - 2-PK46 Black

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
:Inspection Item		YOU LONG ELECTRONICS LIMITED	
:Cp/Cpk and SPC Control Item		TITLE 59A 1X3 8P8C PCB JACK WITH SHIELDED SIDE ENTRY,ROUND PIN	
DIMENSION IN mm [Inch]		图号	图号
TOLERANCE UNLESS OTHERWISE SPECIFIED		FILE NO.	DWG NO.
.X± 0.20 X.*± 1"		.XXX± 0.15	YL59A-S1308A
.XXX± 0.075		批准	审核
批准		批准	批准
DRAW		Oscar	SCALE
1:1		比例	1:1
A3		图幅	A3
1		数量	1
A		版本	A