

更改内容 REV	变更日期 DATE	制图 DRAW	审核 APPROVE
A	2012/10/29	JDL	Oscar

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE : 500 MEGOHMS MIN. @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ, 1MIN.

MECHANICAL:



- HOUSING MATERIAL : NYLON+30%GF UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46mm$.
- PLATING : GOLD PLATING OVER NICKEL.
- SHIELD: COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- LED-OPTION
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO +70°C.
- WAVE SOLDERING TEMPERATURE: 255~265° (5~10SECONDS).
- ROHS COMPLIANT
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 59A-S1508A-XX

GOLD PLATING "u"
1-Fu" 2-2u" 3-3u" 4-6u"
PLASTIC MATERIAL&COLOR:Black/Yellow/Gray
2-PA46 Black

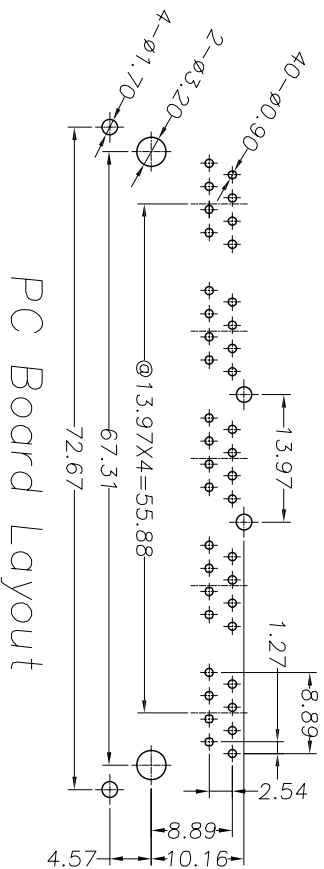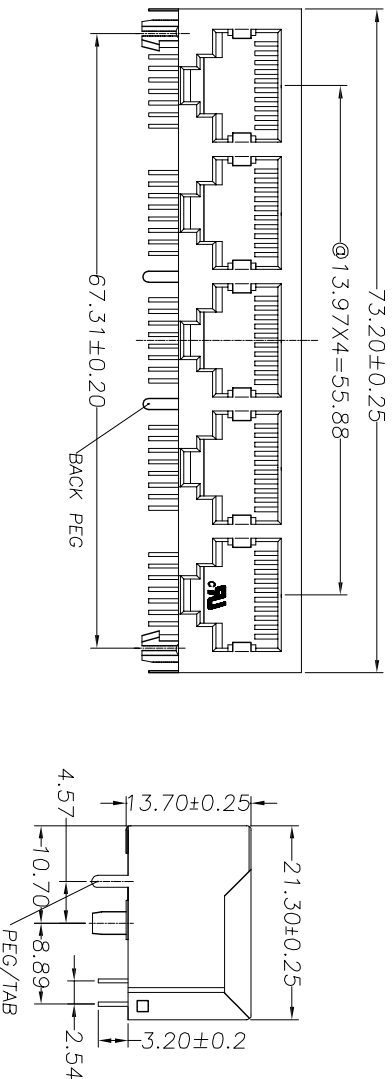

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
:Cp/Cpk and SPC Control Item		YOU LONG ELECTRONICS LIMITED	
DIMENSION IN mm [Inch]		图号 FILE NO.	图号 DWG NO.
TOLERANCE UNLESS OTHERWISE SPECIFIED		YLS9A-S1508A	
.X±0.20	X.±1"	59A 1X5 8P8C PCB JACK WITH SHIELDED SIDE ENTRY ROUND PIN	
.XX±0.15	.X.±0.5"	标题 TITLE	审核 CHECK
.XXX±0.075		Oscar	1
检验 APPROVE	检查 CHECK	制图 DRAW	审核 CHECK
		比例 SCALE	图幅 SIZE
		1:1	A3
			1

If you have any questions, Don't hesitate to email sales@rj45jack.com, please!