

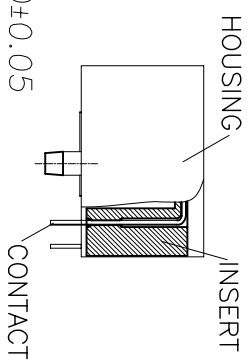
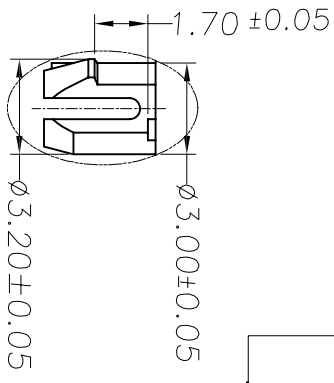
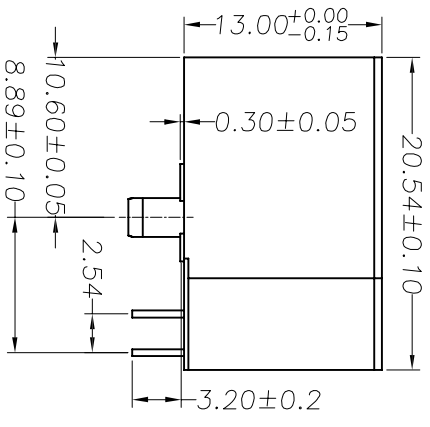


更改 REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

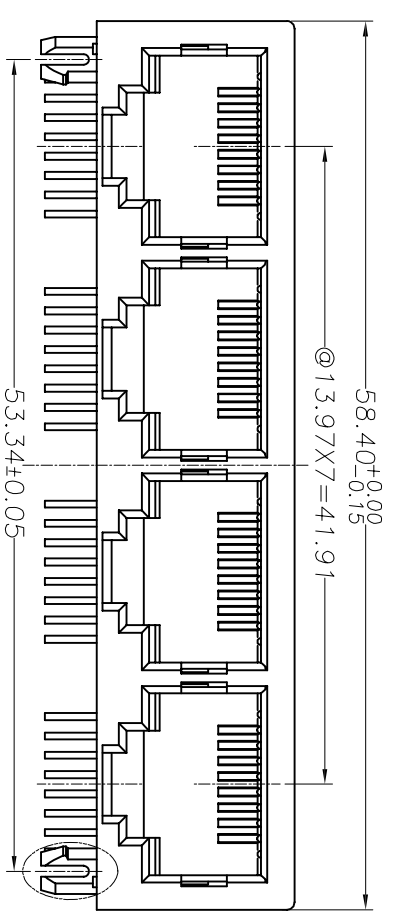

- NOTES:
- ELECTRICAL:**
- VOLTAGE RATING : 125 VAC RMS.
 - CURRENT RATING : 1.5 AMP.
 - CONTACT RESISTANCE : 50 MILLIOHMS MAX.
 - INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
 - DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ, 1MIN.
- MECHANICAL:**
- HOUSING MATERIAL : NYLON+30% G.F U194V-0.
 - CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
 - PLATING : GOLD PLATING OVER NICKEL
 - SHIELD: COPPER ALLOY (OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
 - LED: OPTION
 - OPERATING LIFE : 750 CYCLES MIN.
 - PCB RETENTION PRE-SOLDER : 1 LB MIN.
 - PCB RETENTION POST-SOLDER: 10 LBS MIN.
- ENVIRONMENTAL:**
- STORAGE : -40°C TO +85°C.
 - OPERATION: 0°C TO +70°C.
 - WAVE SOLDERING TEMPERATURE: 255°~265° (5~10SECONDS).
 - ROHS COMPLIANT
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

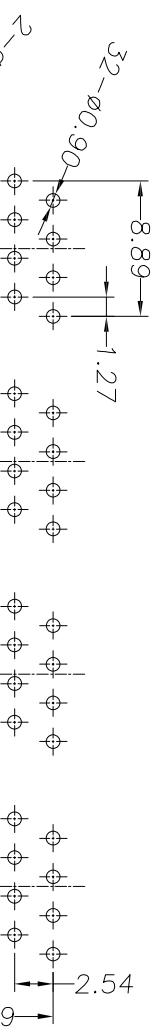

PC Board Layout

PART NUMBER: 59A-N1408A-XX

GOLD PLATING: U" 1-FU 2-2U 3-3U 4-6U"

PLASTIC MATERIAL COLOR: Black/Yellow/Gray
 1-PBT+20%GF Black
 2-PA46 Black
 3-PBT+20%GF Yellow

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
: Cp/Cpk and SPC Control Item		YOU LONG ELECTRONICS LIMITED	
: Inspection Item		图号 DWG NO. YL59A-N1408A	
DIMENSION IN mm [Inch]		名称 TITLE 59A 1X4 8P8C PCB JACK W/D SHIELD SIDE ENTRY ROUND PIN	
TOLERANCE UNLESS OTHERWISE SPECIFIED		比例 SCALE 1:1	
.X±0.20	X"±1"	图框 FRAME A3	
.XX±0.15	.X"±0.5"	审核 REV 1	
.XXX±0.075		制图 DRAW Oscar	
批准 APPROVE	检查 CHECK	数量 QTY 1	

If you have any questions, Don't hesitate to email sales@rj45jack.com, please!