

REV	更改内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN. @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz, 1MIN.



MECHANICAL:

- HOUSING MATERIAL : NYLON+30%GF UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- SHIELD: COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- LED-OPTION
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.


ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO +70°C.
- WAVE SOLDERING TEMPERATURE: 255~265° (5~10SECONDS).
- ROHS COMPLIANT
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 59A-H1408A-XX

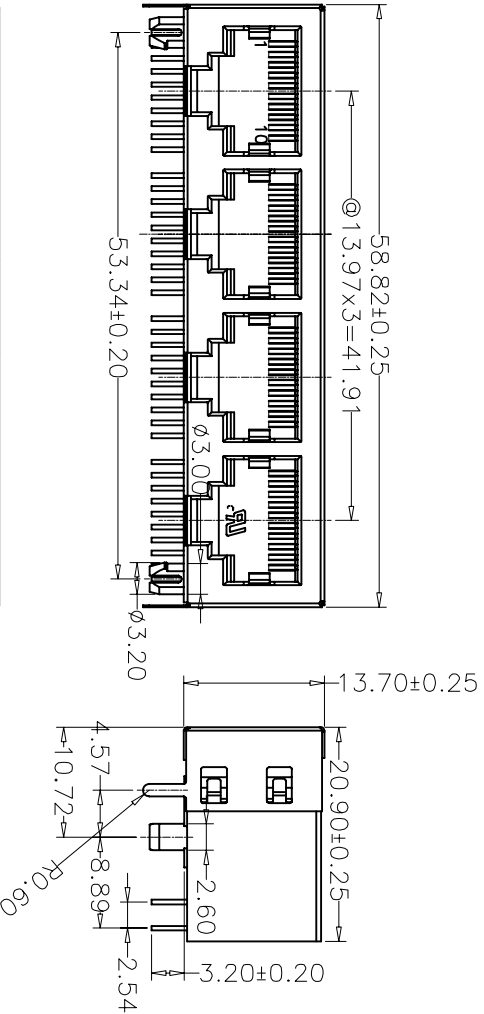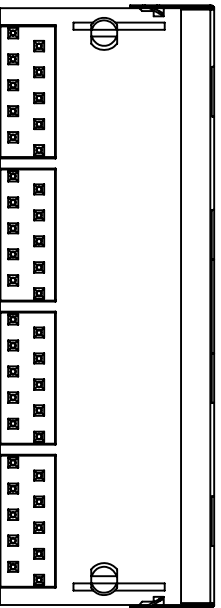

1-GOLD PLATING U"
1-Fu" 2-2u" 3-3u" 4-6u"
PLASTIC MATERIAL&COLOR:Black/Yellow/Gray
2-PA46 Black

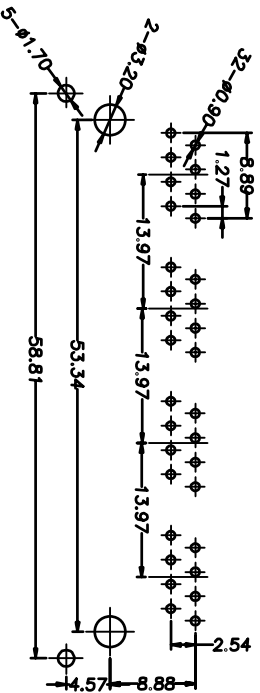

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
:Cp/Cpk and SPC Control Item		YOU LONG ELECTRONICS LIMITED	
DIMENSION IN mm [Inch]		文件号 FILE NO.	图号 DWG NO.
TOLERANCE UNLESS OTHERWISE SPECIFIED		Y.L.59A-H1408A	
.X±0.20	X.±1"	59A 1X4 8P8C PCB JACK WITH HALF SHIELDED SIDE ENTRY ROUND PIN	
.XX±0.15	.X.±0.5"	标题 TITLE	规格 SPEC.
.XXX±0.075		审核 CHECK	制图 DRAW
批准 APPROVE		Oscar	1:1
		比例 SCALE	图幅 SIZE
		A3	1
		审核 REV	A

If you have any questions, Don't hesitate to email sales@rj45jack.com, please!