
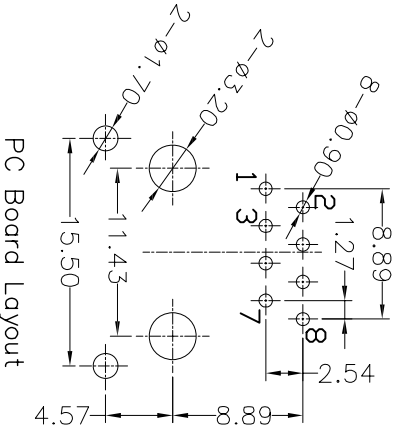


更改内容	日期	制图	审核
REV A	2012/10/29	JDL	Oscar
修改内容			

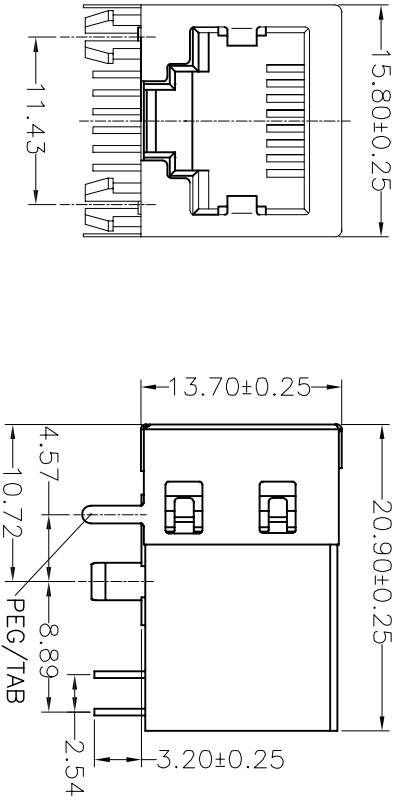

PC Board Layout

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ, 1MIN.


MECHANICAL:

- HOUSING MATERIAL : NYLON+30%G.F U194V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- SHIELD COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- LED-OPTION
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO +70°C.
- WAVE SOLDERING TEMPERATURE: 255~265° (5~10SECONDS).
- ROHS COMPLIANT
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 59A-H1108A-XX

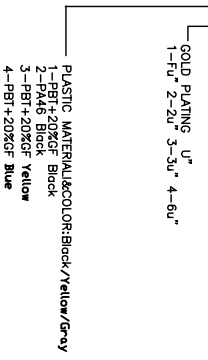

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
YOU LONG ELECTRONICS LIMITED		YOU LONG ELECTRONICS LIMITED	
DIMENSION IN mm [Inch]		公差	
TOLERANCE UNLESS OTHERWISE SPECIFIED		X.± 1"	
.X± 0.20		.X.± 0.5"	
.XX± 0.15		.XXX± 0.075	
.XXX± 0.075		检查	
: Cp/Cpk and SPC Control Item		检查	
: Inspection Item		检查	
FILE NO.		图号	
YLS9A-H1108A		YLS9A-H1108A	
TITLE		名称	
SIDE ENTRY ROUND PIN		59A 1X1 8P8C PCB JACK HALF SHIELDED	
DRAWN		审核	
Oscar		Oscar	
SCALE		比例	
1:1		1:1	
SIZE		图框	
A3		A3	
REV		更改	
1		1	
A		A	

If you have any questions, Don't hesitate to email sales@rj45jack.com, please!