

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 500 VAC RMS 50HZ, 1MIN.



MECHANICAL:

- HOUSING MATERIAL : NYLON(PA46)+30%G.F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm (55210) : GOLD-PLATED IN THE CONTACT AREA
- PLATING
- SHIELD,COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO +70°C.
- IR REFLOW PEAK SOLDERING TEMPERATURE:255°C~265°C 5~10 SECONDS.
- ROHS COMPLIANT
- FCC PART 68, SUBPART F.
- MATES WITH MODULAR PLUG CONFORMING TO

PART NUMBER: DIPE-N1188L1-H7XX

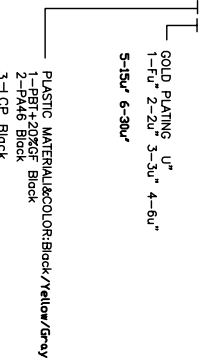

REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
: Cp/Cpk and SPC Control Item		YOU LONG ELECTRONICS LIMITED	
DIMENSION IN mm [Inch]		文件号 FILE NO.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		图号 DWG NO. YLDIPE-N1188L1-H7	
.X ± 0.20	X' ± 1"	标题 TITLE	
.XX ± 0.15	.X' ± 0.5"	DIP 1X1 8P8C Embedded PCB JACK WITH LED, UNSHIELDED	
.XXX ± 0.075		H=8.05MM ,SIDE ENTRY,TAB-UP-FLAT PIN	
批准 APPROVE	检查 CHECK	制图 DRAW	审核 APPROVE
		Oscar	
		比例 SCALE 1:1	图框 FRAME A3
		数量 QTY 1	版本 REV A

If you have any questions, Don't hesitate to email sales@rj45jack.com, please!