

REV	更改内容 MODIFICATION	日期 DATE	制图 DRAW	检查 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 500 VAC RMS 50Hz, 1MIN.

MECHANICAL:





- HOUSING MATERIAL : NYLON(PA46)+30%G.F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm (C5210)
- PLATING : GOLD-PLATED IN THE CONTACT AREA
- SHIELD COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO +70°C.
- IR REFLOW PEAK SOLDERING TEMPERATURE:255°C~265°C 5~10 SECONDS.
- ROHS COMPLIANT
- FCC PART 68, SUBPART F.
- MATES WITH MODULAR PLUG CONFORMING TO

PART NUMBER: SMTB-S11880-H2X

GOLD PLATING U<sup>1</sup>  
1-3u" 2-6u" 3-15u" 4-30u"

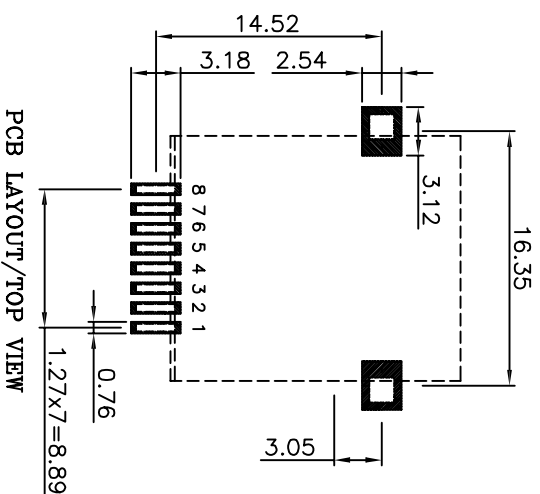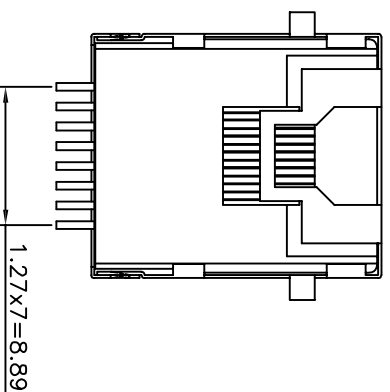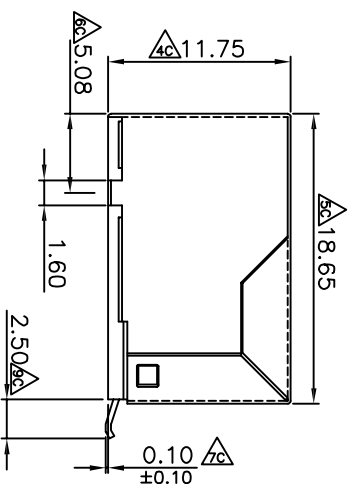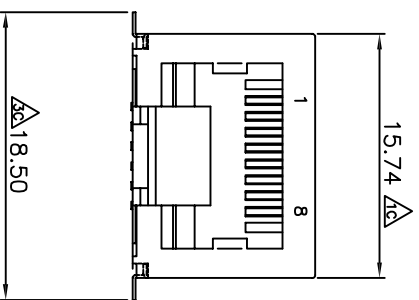

HTTP://WWW.RJ45JACK.COM		YOU LONG CONNECT THE WORLD	
: Cp/Cpk and SPC Control Item		YOU LONG ELECTRONICS LIMITED	
DIMENSION IN mm [Inch]		图号 FILE NO.	图号 DWG NO. YLSMTB-S11880-H2
TOLERANCE UNLESS OTHERWISE SPECIFIED			
.X± 0.20	X*± 1"		
.XXX± 0.15	.X*± 0.5"		
.XXX± 0.075			
检查 APPROVE	检查 CHECK	制图 DRAW	检查 CHECK
		Oscar	
		比例 SCALE	图幅 SIZE
		1:1	A3
		张数 REV	1 / 1

If you have any questions, Don't hesitate to email sales@rj45jack.com, please