
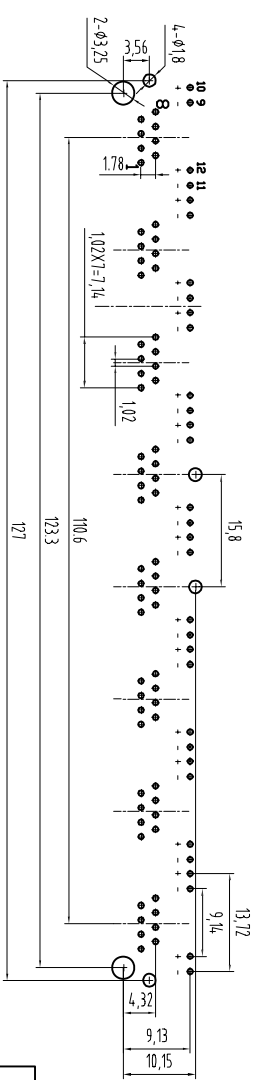

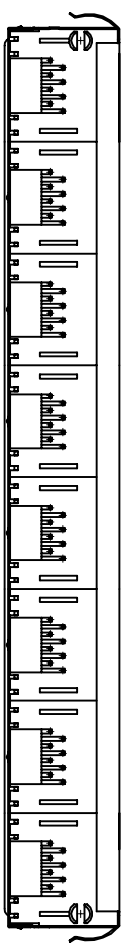


1 2 3 4 5 6 7 8

REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	批准 APPROVE
A	版面发行	2012/10/29	JDL	Oscar



NOTES:

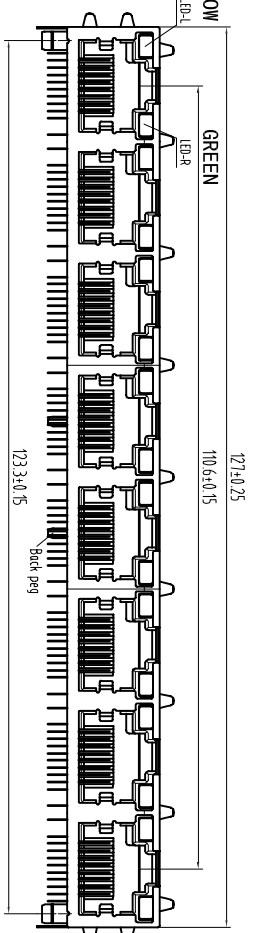

PC Board Layout

- MATERIAL:
- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER(U94V-0) (C5100).
 - 2.CONTACT MATERIAL :PHOSPHOR BRONZE ϕ 0.46mm (C5100).
 - 3.PLATING :GOLD PLATING OVER NICKEL.
 - 4.SHIELD,COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
 - 5.LED,OPTION.
- ELECTRICAL:
- 1.VOLTAGE RATING :125 VAC RMS.
 - 2.CURRENT RATING :1.5 AMP.
 - 3.CONTACT RESISTANCE :50 MILLIOHMS MAX.
 - 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
 - 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.
 - 6.LED RATINGS-FORWARD VOLTAGE:2 VOLTS TYPICAL. REVERSE VOLTAGE:5 VOLTS MAXIMUM.
- MECHANICAL:
- 1.DURABILITY:750 CYCLES MIN.
 - 2.PCB RETENTION PRE-SOLDER
- ENVIRONMENTAL:
- 1.STORAGE :-40°C TO +85°C.
 - 2.OPERATION : -20°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

PART NUMBER: 56A-S1888L1-E2XX

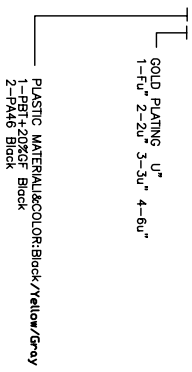

HTTP://WWW.RJ45JACK.COM

YOU LONG CONNECT THE WORLD

YOU LONG ELECTRONICS LIMITED

DIMENSION IN mm [Inch]		TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X±0.20	X.±1°	.XXX±0.15	.X.±0.5°
.XXX±0.075			

REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	批准 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

1 2 3 4 5 6 7 8

If you have any questions,Don't hesitate to email sales@rj45jack.com,please!