

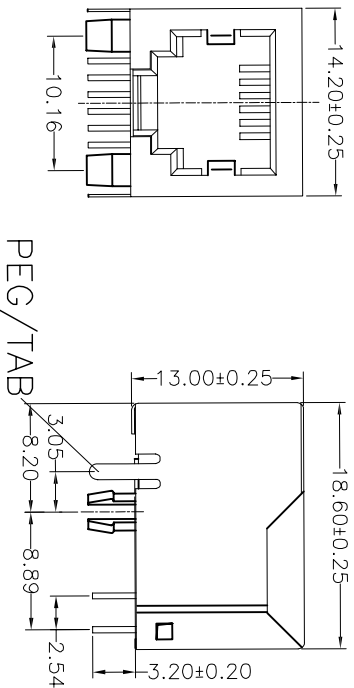


REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar



PEG/TAB



PC Board Layout

NOTES:

MATERIAL:

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER(U94V-0).
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE T=0.35mm.
- 3.PLATING :GOLD PLATING OVER NICKEL.
- 4.SHIELD COPPER ALLOY 0.20mm THICKNESS PLATING NI.

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :1.5 AMP.
- 3.CONTACT RESISTANCE :50 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
- 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50HZ. 1MIN.

MECHANICAL:

- 1.DURABILITY :750 CYCLES MIN.
  - 2.PCB RETENTION PRE-SOLDER :1 LB MIN.
- ENVIRONMENTAL:  
1.STORAGE :-40°C TO +85°C.  
2. OPERATION : 0°C TO 70°C.  
MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

PART NUMBER: 58A-S1166C-XX

- 1-GOLD PLATING "U"  
1-Fu" 2-2u" 3-3u" 4-6u"
- PLASTIC MATERIAL:COLOR:Black/Yellow/Gray
- 1-PS10-20PCS/Block
- 2-PA46/Block

:Inspection Item		:Cp/Cpk and SPC Control Item	
DIMENSION IN mm [Inch]			
TOLERANCE UNLESS OTHERWISE SPECIFIED		X.* ± 1"	
.X ± 0.20		.X.* ± 0.5"	
.XXX ± 0.15			
.XXX ± 0.075			
审核 APPROVE	检查 CHECK	制图 DRAW	审核 APPROVE
YOU LONG CONNECT THE WORLD		YOU LONG ELECTRONICS LIMITED	
HTTP://WWW.RJ45JACK.COM		图号 DWG NO. YL58A-S1166C	
TITLE 58A 1X1 6P6C PCB JACK WITH SHIELDED SIDE ENTRY,ROUND PIN		审核 SCALE 1:1	
Oscar		审核 SIZE A3	
		审核 REV 1	
		审核 A	



If you have any questions,Don't hesitate to email sales@rj45jack.com,please!